

### Key Features

Best for applications where the ratio (Normal Flow/ Set Point) is 10:1 or Greater, Minimal Pressure Drop.

### Features

- Broad Range of Adjustability
- Compact Size
- High Resolution
- Materials: 316S S, Brass or Teflon®

### Applications

- Welding Systems
- Analyzers
- Vacuum Systems
- Cooling Systems

### Operation

When flow is increased, the magnetic piston is forced against a bias spring. As the magnet comes near the adjustable reed switch it actuates, indicating proper flow. When flow decreases the spring forces the piston in the opposite direction deactuating the reed switch an indicating a reduced or no flow situation. The magnetic piston actuates a hermetically sealed reed switch, which is encapsulated in the body of the unit, out of the air/water path.

- All models field adjustable
- Deactuation (decreasing flow) averages 40% less than actuation (increasing flow)
- Repeatability ± 2%
- Correction must be made for attitudes other than horizontal
- Unit will pass greater flows



Specifications			
Model	Weight Lbs (kg)	Max Working Pressure PSIG (barg)	Wetted Parts
LCA-250-P	0.375 (0.17)	100 (6.89)	PVC, Epoxy, 316SS
LCA-250-B	1.4 (0.635)	1500 (103.42)	Brass, Epoxy, 316SS
LCA-250-S	1.4 (0.635)	3000 (206.84)	316SS, Epoxy
LCA-375-P	0.375 (0.17)	100 (6.89)	PVC, Epoxy, 316SS
LCA-375-B	1.4 (0.635)	1500 (103.42)	Brass, Epoxy, 316SS
LCA-375-S	1.4 (0.635)	3000 (206.84)	316SS, Epoxy
LCA-500-P	0.375 (0.17)	100 (6.89)	PVC, Epoxy, 316SS
LCA-500-B	1.4 (0.635)	1500 (103.42)	Brass, Epoxy, 316SS
LCA-500-S	1.4 (0.635)	3000 (206.84)	316SS, Epoxy
LCA-750-P	0.625 (0.283)	100 (6.89)	PVC, Epoxy, 316SS
LCA-750-B	1.7 (0.771)	1500 (103.42)	Brass, Epoxy, 316SS
LCA-750-S	1.7 (0.771)	3000 (206.84)	316SS, Epoxy

Calibration Range			
Model	Adjustable Range Increasing Flow Water LPM (GPM)	Air LPM (SCFM)	Inlet/Outlet FNPT Port Inches
LCA-250*	0.38-15.1 (0.10 - 4)	14.16 (0.5) 1416 (5)	1/4"
LCA-375*	1.89-15.1 (0.5 - 4)	14.16 (0.5) 1416 (5)	3/8"
LCA-500*	1.89 - 37.9 (0.5 - 10)	28.32 (1) 2124 (75)	1/2"
LCA-750*	3.79 - 56.8 (1 - 15)	114.60 (5) 3398 (120)	3/4"


Pressure Loss		
Model	Water LPM (GPM)	ΔP BARD (PSID)
LCA-250/375		
Minimum	0.38 (0.10)	0.34 (0.5)
Maximum	15.14 (4)	0.21 (3)
LCA-500		
Minimum	1.89 (0.5)	0.069 (1)
Maximum	37.85 (10)	0.689 (10)
LCA-750		
Minimum	3.79 (1)	0.10 (1.5)
Maximum	56.8 (15)	0.62 (9)



### Temperature Operating Range

- 0° to 228°F (-17° to 104°C) for Brass and Stainless Steel
  - 32° to 120°F (0° to 49°C) for PVC
  - 32° to 120°F for Acrylic
- For other temperature ranges consult factory

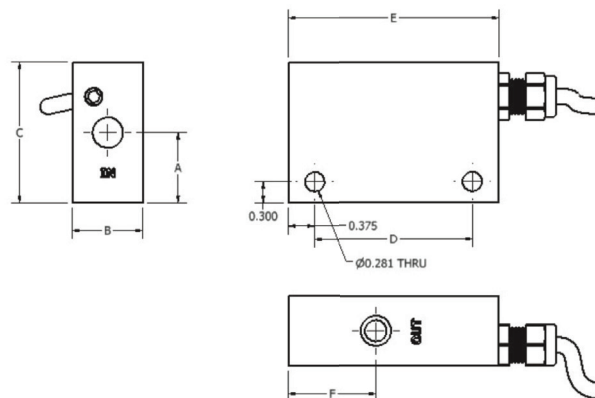

Switch Data	SPST	SPDT
Maximum Switching Voltage		
DC (V)	200	175
AC (V)	150	120
Contact Rating		
DC (W)	50	5
DC (VA)	70	5
Maximum Switching Current (A)		
DC (A)	1.0	0.25
AC (A)	0.7	0.25



Leads	SPST UL File #E70063	SPDT UL File #E471070
 <p>leads 39 in. min. from body 22 AWG, PVC Jacketed Wired</p>	 <p>leads 39 in. min from body 22 AWG PVC jacketed wired</p> <ul style="list-style-type: none"> <li>• red - N.C.</li> <li>• green - N.O.</li> <li>• black - Common</li> </ul>	

### Installation

Mount with the inlet port on the side horizontally. Other attitudes change the adjustable range of the unit. A 100 micron filter is recommended.

Dimensions						
Model	A	B	C	D	E	F
LCA-250	1.00 (25.4)	1.00 (25.4)	2.00 (50.8)	2.25 (57.15)	3.0 (76.2)	1.25 (31.8)
LCA-375	1.00 (25.4)	1.00 (25.4)	2.00 (50.8)	2.25 (57.15)	3.0 (76.2)	1.25 (31.8)
LCA-500	1.00 (25.4)	1.00 (25.4)	2.00 (50.8)	2.25 (57.15)	3.0 (76.2)	1.25 (31.8)
LCA-750	1.63 (41.4)	1.25 (31.8)	2.75 (69.9)	3.25 (82.55)	4.0 (101.6)	1.63 (41.4)

## How to Order

Sales@ChemTec.com | 800.222.2177

Model	Materials	Type of Service	Switch
LCA 250	P PVC	W Water	N.O. Normally Open
375	A Acrylic	G Gas	SPDT Single Pole Double Throw
500	B Brass		FP* Factory Preset
750	S 316SS		

\*Consult Factory

All dimensions are subject to change for quality improvement. Not responsible for printing errors.