

### Key Features


Best for applications where the normal flow to set point is 10:1 or greater.

### Features

- Adjustable Flow Monitor
- Monitors both Gases and Liquids
- Materials: Brass or 316SS
- Confirms: Normal Flow Conditions
- Senses: High Flow or Low Flow Conditions
- Output: Switch Contact

### Applications

- Process Controls
- Fire Control Systems
- Water Treatment Chemicals
- Cooling Systems
- Heat Pumps
- Hydraulic Lifts
- Industrial Analyzers
- Plant Safety



### Operation

When flow is increased, the magnetic piston is forced against a bias spring. As the magnet comes near the adjustable reed switch it actuates, indicating proper flow. When flow decreases the spring forces the piston in the opposite direction deactuating the reed switch and indicating a reduce or no flow condition. The magnetic piston actuates a hermetically sealed reed switch, which is encapsulated in the body of the unit, out of the air/water path.

- Actuation points for air at 68 F and 14.7 PSIA with increasing flow.
- Deactuation (decreasing flow) averages 40% less than actuation (increasing flow)
- Repeatability  $\pm 2\%$
- Unit will pass greater flows

Correction must be made for other fluids, line pressure and temperatures. Please consult your representative or the factory.

### Calibration Range

Model	Weight Lbs (kg)	Max Working Pressure PSIG (barg)	Wetted Parts
FAV-250-B	1.4 (0.635)	1500 (103.42)	Brass, Epoxy, 316SS
FAV-250-S	1.4 (0.635)	3000 (206.84)	316SS, Epoxy
FAV-375-B	1.4 (0.635)	1500 (103.42)	Brass, Epoxy, 316SS
FAV-375-S	1.4 (0.635)	3000 (206.84)	316SS, Epoxy
FAV-500-B	1.4 (0.635)	1500 (103.42)	Brass, Epoxy, 316SS
FAV-500-S	1.7 (0.635)	3000 (206.84)	316SS, Epoxy
FAV-750-B	1.7 (0.771)	1500 (103.42)	Brass, Epoxy, 316SS
FAV-750-S	1.7 (0.771)	3000 (206.84)	316SS, Epoxy

### Temperature Operating Range

- 0° to 220°F (-17° to 104°C) for Brass and Stainless Steel
- For other temperature ranges consult factory.

### Pressure Loss



Model	Air SLPM (SCFM)	Water LPM (GPM)	Inlet/Outlet FNPT Port Inches
FAV-250			1/4"
Minimum	14.16 (0.5)	0.38 (0.10)	
Maximum	1416 (50)	15.14 (4)	
FAV-375			3/8"
Minimum	14.16 (0.5)	0.38 (0.10)	
Maximum	1416 (50)	15.14 (4)	
FAV-500			1/2"
Minimum	28.32 (1)	1.89 (0.5)	
Maximum	2124 (75)	37.85 (10)	
FAV-750			3/4"
Minimum	141.6 (5)	3.78 (1)	
Maximum	3398 (120)	75.7 (20)	


### Specifications

Model	Air Flow Rate SLPM (SCFM)	Water Flowrate LPM (GPM)	$\Delta P$ to Atmosphere BARD (PSID)
FAV-250/375			
Minimum	14.2 (0.5)	0.38 (0.10)	0.34 (0.5)
Maximum	1416 (50)	15.14 (4)	0.21 (3)
FAV-500			
Minimum	28.32 (1)	1.89 (0.5)	0.069 (1)
Maximum	2124 (75)	37.85 (10)	0.689 (10)
FAV-750			
Minimum	141.6 (5)	3.78 (1)	0.10 (1.5)
Maximum	3398 (120)	75.7 (20)	0.62 (9)



Switch Data	SPST	SPDT
Maximum Switching Voltage		
DC (V)	250	175
AC (V)	265	120
Contact Rating		
DC (W)	50	5
DC (VA)	50	5
Maximum Switching Current (A)		
DC (A)	1.5	0.25
AC (A)	1.1	0.18

Leads	SPST UL File #E47258	SPDT UL File #E47258
 <p>leads 18 in. min. from body 22 AWG, TFE insulation</p>	 <p>leads 18 in. min. from body 24 AWG, TFE insulation</p> <ul style="list-style-type: none"> <li>• green - N.C.</li> <li>• blue - N.O.</li> <li>• white - Common</li> </ul>	<p>leads 18 in. min. from body 24 AWG, TFE insulation</p> <ul style="list-style-type: none"> <li>• green - N.C.</li> <li>• blue - N.O.</li> <li>• white - Common</li> </ul>

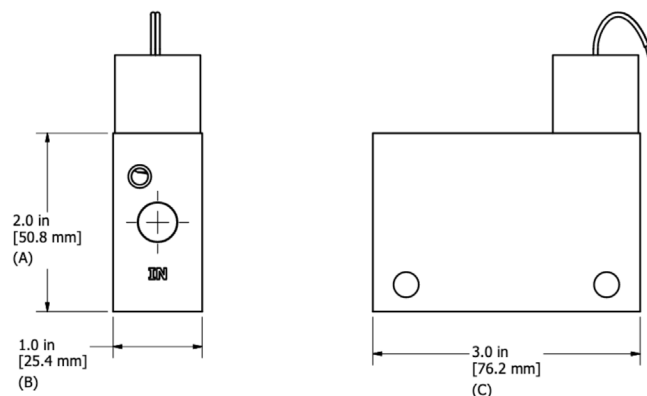

### Installation

Mount with the inlet port on the side horizontally. Other attitudes change the adjustable range of the unit. A 100 micron filter is recommended.

### Dimensions

Model	A	B (Metal)	B (Plastic)	C
FAV-250	2.0 (50.8)	1.00 (25.4)	1 (25.4)	3.0 (76.2)
FAV-375	2.0 (50.8)	1.00 (25.4)	1 (25.4)	3.0 (76.2)
FAV-500	2.0 (50.8)	1.00 (25.4)	1 (25.4)	3.0 (76.2)
FAV-750	2.75 (69.9)	1.25 (31.8)	1.25 (31.8)	4.0 (101.6)

### How to Order

Sales@ChemTec.com | 800.222.2177

Model	Materials	Type of Service	Switch	Options
FAV 250	B Brass	W Water	N.O. Normally Open	HT High Temperature Options 340 ° F (171°C)
375	S 316SS	G Gas	SPDT Single Pole	KZ FFKM Perfluoroelastomer
500			Double Throw	EPR EPR Seals
750				BN Buna N Seals
				FP* Factory Preset

\*Consult Factory | Viton® - E.I. Dupont & Co | Teflon® - E.I. Dupont & Co | Kalrez® - E.I. Dupont & Co  
All dimensions are subject to change for quality improvement. Not responsible for printing errors.